


DIMENSIONS

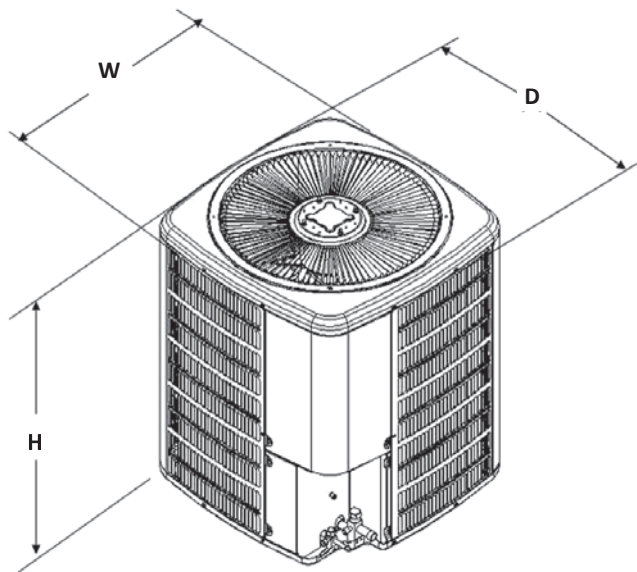

MODEL	DIMENSIONS
SSZ160241A*	29x29x38¼
SSZ160361A*	35½x35½x38¼
SSZ160481A*	35½x35½x38¼
SSZ160601B*	35½x35½x38¼

ACCESSORIES

MODEL	DESCRIPTION	SSZ16024	SSZ16036	SSZ16048	SSZ16060
ABK-20	Anchor Bracket Kit*	X	X	X	X
CSR-U-1	Hard-start Kit	X	X		
CSR-U-2	Hard-start Kit		X	X	X
CSR-U-3	Hard-start Kit			X	X
FSK01A ¹	Freeze Protection Kit	X	X	X	X
OT18-60A ²	Outdoor Thermostat w/ Lockout Stat	X	X	X	X
TX2N4A ³	TXV Kit	X			
TX3N4 ³	TXV Kit		X		
TX5N4 ³	TXV Kit			X	X

* Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Required for heat pump applications where ambient temperatures fall below 0° F with 50% or higher relative humidity.

³ Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device. The TXV should always be sized based on the tonnage of the outdoor unit.

